
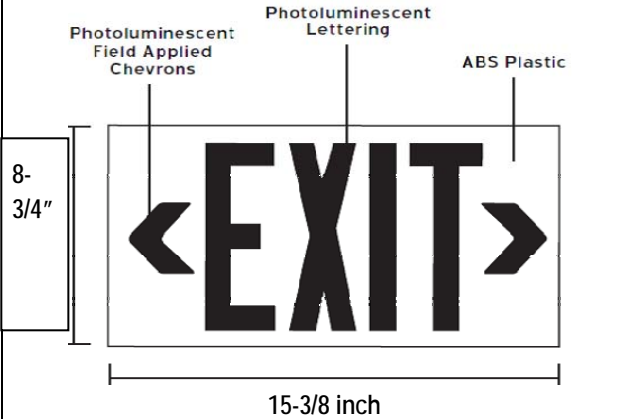



UL 924 *Standard for Emergency Lighting*
listed by Underwriters Laboratories Inc

Photoluminescent
100-foot viewing distance EXIT Sign:
LED Activation

Item-No:	Description:	Dimensions:
<p>600LED-RED</p> <p>600LED-GREEN</p>	<p>100 foot viewing distance energy-efficient Photoluminescent EXIT Sign: 15-3/8" x 8-3/4" x 3/4"</p> <p>Red Plastic body with photoluminescent yellowish letters EXIT plus two chevrons inside the packing unit [< >].</p> <p>Green Plastic body with photoluminescent yellowish letters EXIT plus two chevrons inside the packing unit [< >].</p> <p>Also available DOUBLE-sided: Add -DB to Item-Number</p> 	 <p>8-3/4"</p> <p>15-3/8 inch</p> 

Compliances

Photoluminescent Exit Sign

- ✓ In compliance with IBC and IFC codes
- ✓ In compliance with NFPA 101-*Life Safety Code*
- ✓ OSHA compliant
- ✓ UL 924-Listed by Underwriters Laboratories Inc for Indoor Use
- ✓ Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 fc (54 lux) of **LED (Light Emitting Diode) or fluorescent** light on the face(s) of the sign at all times of building occupancy.
- ✓ Listed for high-location and floor-proximity installation

Benefits

- No energy consumption: no electricity cost; green design and LEED points qualified
- No maintenance: no bulbs, no battery replacement
- Non-toxic, non-radioactive: No disposal cost. Recyclable.
- Consistent, uniform illumination
- Visible at 100 feet