

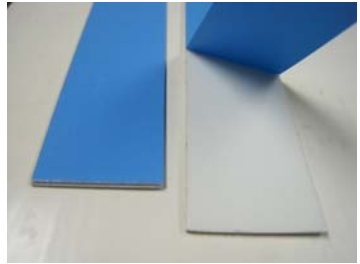


UL1994-listed by Underwriters Laboratories: Photoluminescent Egress Path Marking System Component	Aluminum Strip, photoluminescent Item-No.: 83-60207
---	--

Item-No:	Description:	Dimensions:
----------	--------------	-------------

83-60207	<p>Aluminum, min. 1/64" = 0.5 mm thick incl. surface-coated photoluminescent strontium-aluminate pigment. Supported by white foamy adhesive.</p> <p>Floor-suitability tested for Step & Landing Edges and Floor-mounted Perimeter Demarcation Lines.</p> <p>Wall-suited as Wall-mounted Perimeter Demarcation Line, on Exit Door Frames leading out to safety.</p> <p><i>Do NOT use this Alu Strip on Handrails and on Push Bars.</i></p> <div style="text-align: center;">  <p>UL Model-Number: CC-ALU</p> </div>	<p style="text-align: center;">1-inch x 48-inch Metal Strip</p> <div style="text-align: center;">  <p>Top View with UL1994-Labeling per NYC Local Law 141</p> </div>
----------	--	---

<p>ADHESIVE PRODUCT ATTRIBUTES:</p> <p>Closed-cell polyethylene foam coated with an aggressive acrylic adhesive system for optimum compatibility to a variety of materials. Adhesive is constructed with patented cellular structured foam that is particularly resistant to weathering and water-absorption while providing a superior long-lived seal.</p> <ul style="list-style-type: none"> • Seals effectively against water, dust and light • Superior resistance to weathering, oxidation, and exposure to ultraviolet light • Special non-yellowing, non-staining water-white adhesive provide a clean aesthetic appearance • Remains flexible at low temperatures and dimensionally stable at high temperatures • Preformed tape provides consistent and accurate application – no shim is required • Ease of use: requires no clean up, easy to handle, no waste, requires no mixing or special application equipment • See our Main Catalog for Recommended Accessories 	<div style="text-align: center;">  <p>Bottom View showing foamy adhesive (may have blue or white liner)</p> </div>
--	--

Typical Use

<p>Photoluminescent Egress Path Marking Component</p> <ul style="list-style-type: none"> ✓ In compliance with IBC 2009 + 2012 Editions; Section 1024 'Luminous Egress Path Markings' ✓ In compliance with IBC 2015 + 2018 Editions; Section 1025 'Luminous Egress Path Markings' ✓ In compliance with NFPA 101-<i>Life Safety Code</i> Section 7.2.2.5.5 'Exit Stair Path Markings' ✓ In compliance with NYC Local Law 141 - with NYC required Labeling ✓ UL1994-listed by Underwriters Laboratories, Inc. to 'Standard for Luminous Egress Path Marking Systems' as Model: CC-ALU 'Suitable for Wall and Stair Nosing/ Floor Use' Listed in half inch (= 1/2") strip width ✓ UL410-listed to Standard for Slip Resistance of Floor Surface Materials ✓ Activation by LED and Fluorescent Lighting <p>Ideal as</p> <ul style="list-style-type: none"> • Wall-mounted Perimeter Demarcation Line with the bottom edge no more than 4-inch above the finished floor • Floor-mounted Perimeter Demarcation Line within 4-inch of the wall • Step Nosing and Leading Edge of Landing Marking • also works on Diamond-plated Surfaces with additional Construction Adhesive underneath • Door Frames, leading out of exit enclosures
